

Chapter 19. Tools

A wheel brace, box spanner and tommy bar, jack and jack handle are stored in a black grained PVC tool bag 11H169 which is 0.012" thick 27 1/4" long.

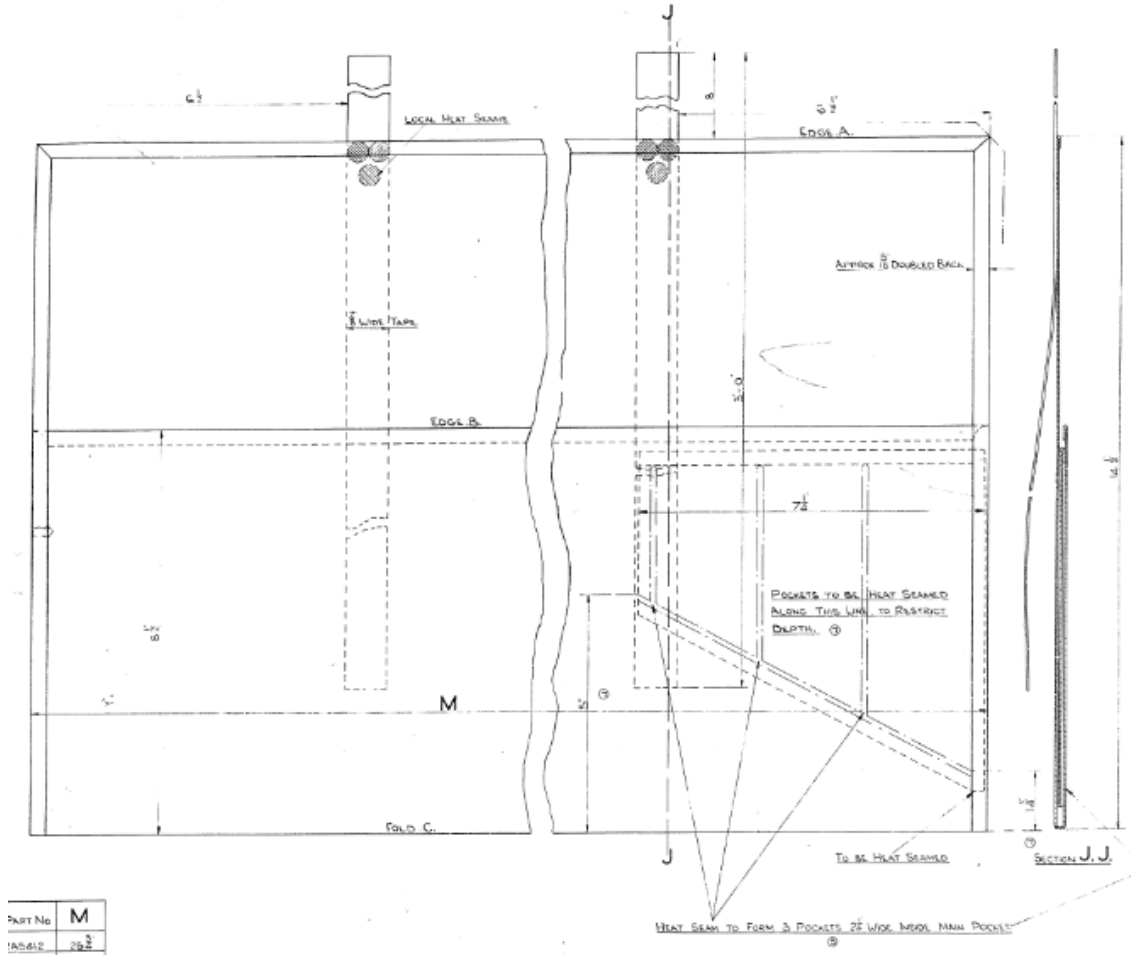


Fig. 19.1 Tool bag 2A5412.

There appear to be several types of jack supplied. 13H635 is a cantilever type of jack with a ratchet handle, for use at each corner, the end of which fits into one of the outer slots in the rear subframe, and, by use of a levelling block, the front lateral cross member. The later introduced local part AYA2156 is used for jacking up one side of the vehicle at a time. For a period in 1962, a jack screw was supplied with a T handle and square drive end, this type of jack most likely supplied by the selling dealer.

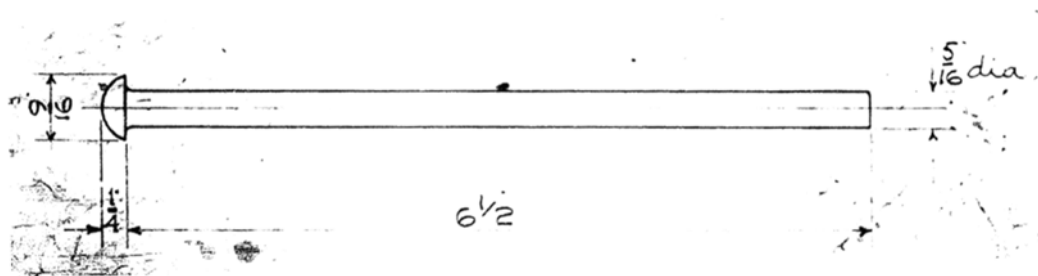


Fig. 19.2 Tommy bar 2H86.